



## DD495

20 m volumetric Dual motion sensor

### Twin Opposed Antennae

Firstly the DD 400AM Series of detectors makes no compromises because it is a dual technology detector. It utilises all the good features of our PIR's, including sealed Gliding Focus Mirrors and the latest 4D signal processing. Add to that the GE Security high quality microwave module, where the latest design using Twin Opposed Antennae has been used to ensure a better signal to noise ratio and better microwave direction. The end result are products with sharp detection and excellent false alarm immunity.

### Distance of Motion (DoM) Processing

This proprietary microwave processing converts the analogue signal into a digital one where the custom ASIC can effectively measure the distance travelled by the intruder, irrespective of the intruders speed or distance from the detector. This gives a significantly more uniform microwave signal over the entire protected area and prevents microwave "hot spots" close into the detector.

### Volumetric Curtains of Detection

Benefitting from the success of the EV series PIR's, the DD 400AM also features solid curtains of detection. Full undercrawl protection gives maximum security while the special characteristics of a "curtain" ensures not only better intruder detection but also better PIR stability from the environment.

### "4D" Signal processing

4D signal processing is the latest generation of PIR processing taken from the EV 400 Plus.

4D allows the PIR channel to intelligently analyse a signal pattern and distinguish between real human movement and false alarm hazards. The PIR channel in its own right is resistant to false alarms by analysing the size, shape and speed of successive signals. The "Moving Pole Filters" recently added to the 4D processing ensures real immunity to traditionally harsh environments.



### Standard Features

- PIR verified by microwave module
- "Step & Gliding Focus Multi Curtain" mirror optic
- Sealed optics
- ASIC with "4D" processing
- Distance of Motion microwave signal processing
- Selectable range with full undercrawl detection
- No adjustment required for different mounting heights
- Tolerates wall angle deviation
- Complies with EN50131-2-2
- Several European approvals

# DD495


20 m volumetric Dual motion sensor

## Specifications

Detection range	20 m
Undercrawl protection	Yes
Detection range selection	20 m or 12 m or 7 m
Coverage field of view	60° with 7 curtains
Coverage pattern selection	Blinders and curtain labels
Mounting height	1.8 to 3.0 m
Power supply	9 to 15 VDC
Current consumption (nom.)	14.5 mA
Alarm relay (voltage free)	NC when energised
Tamper relay (voltage free)	NC when cover closed
Remote control lines	Walk test
Alarm memory	No
Microwave frequency (nom.)	2410 MHz
PIR only mode	Only on DD498
Dimensions (W x H x D)	74 x 125 x 53 mm
Ambient conditions	-10 to +55°C; 95% relative humidity
Pry-off tamper	ST400 (optional)
EN50131-2-2	Grade 2

## True Range Control

The DD 400AM series is able to adjust both the PIR and Microwave channels. Due to the strength of the Gliding Focus Curtain Mirror, it is possible to reduce how hard the detector is working in smaller rooms, in both the PIR and Microwave channels, making the detector even more stable, without compromising its excellent detection.

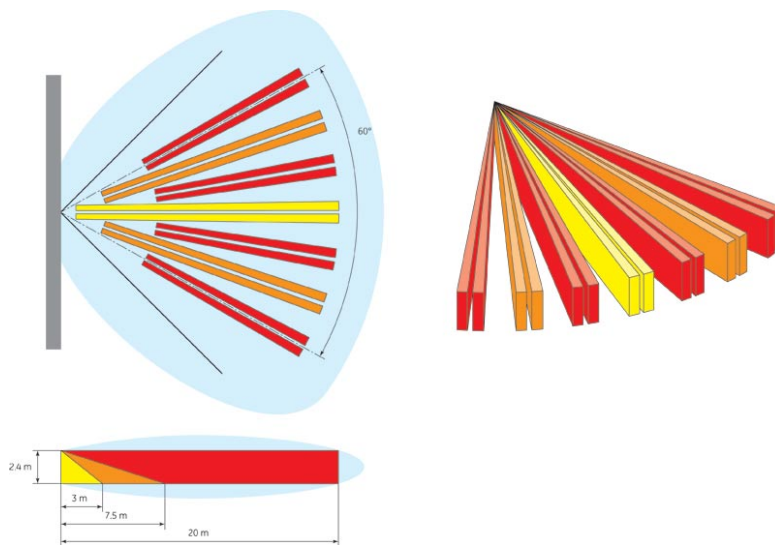

## Ordering Information

Part No.	Description
DD495	Dual Detector with 7 curtains of 20 m NC Relay
DD498	Dual Detector with 7 curtains of 20 m CO Relay & Alarm memory
SB01	Wall/ceiling mount bracket ( $\pm 45^\circ$ horizontal, $0^\circ$ or $-5^\circ$ vertical)



[www.gesecurity.net](http://www.gesecurity.net)