

SSC-1000(P)

SmartDome Controller



Summary

SSC-1000 can be used to control SCC-641/643, SCC-931T and SCC-421A IC series (Intelligent Cameras). SSC-1000 features a backlight LCD, a four-direction joystick, camera call up and camera programming buttons.

Up to eight SSC-1000 devices may be used in the system configuration. SSC-1000 can control up to 128 IC series cameras or SDM-160 multiplexers utilizing RS-485 protocol.



SSC-1000(P)

SmartDome Controller


Features

- Long distance control : Up to 1.2km on RS-485 communication.
- IC (Intelligent Camera) series controller for :
 - SCC-641 - Motorized speed dome
 - SCC-643A - Motorized Day/Night speed dome
 - SCC-C4201A - Motorized zoom camera
 - SCC-931T - Armored motorized zoom camera
 - SCC-341 - Low light color camera
- Controls up to 128 smart dome cameras or SDM-160 multiplexers
- Up to eight SSC-1000 controllers in each system

Rear Panel



Dimensions (unit : mm)

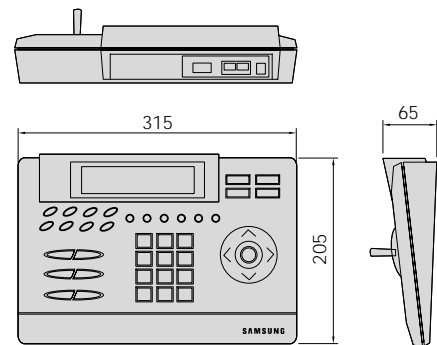

Specifications

SSC-1000(P)			
Communication	Interface Type	RS-485	
	Connector Type	Modular Type x 2, D-Sub x 1	
	Baud Rate	4,800/9,600/19,200/38,400 bps	
Display	LCD	20 x 4 line	
	LED	Menu, Preset, Pattern, Scan, Auto Pan Auto Pan, Reset	
Switching & Control	Video Switching	Sequence, Tour, Salvo	
	Pan/Tilt & Lens Control	Pan left/right	Tilt up/down
		Iris open/ close	Focus far/ near
		Zoom tele/wide	Preset, Auto pan, Scan, Pattern
		External Machinery Control	Aux1, Aux2, Aux3, Aux4
		Power Source	DC 9V, 500mA
Dimensions (W x H x D)	315 x 65 x 205mm		
Weight	Approx. 1.1Kg (excluding packing materials)		
RS-485 Connector	No 3(Yellow) : DATA "+", No 5(Red) : DATA "-"		
D-SUB Connector	No 2 : DATA "+", No 3 : DATA "-"		

* Design and specifications are subject to change without notice.



SAMSUNG ELECTRONICS CO.,LTD.

Digital Video Division
416, Maetan-3Dong, Yeongtong-Gu, Suwon City, Gyeonggi-Do, Korea 443-742
Tel: +82-31-200-5504, 5578 Fax: +82-31-200-5594
<http://www.securitysamsung.com>