



MAGIC

PIR Motion Detectors

PDM-I12

PDM-I12T



MAGIC motion detector PDM-I12/T is impressive with its modern and elegant design. Its style is suitable for all installation situations. Together with the enhanced Visatec algorithm, its patented MAGIC mirror provides reliable detection of intruders and the highest false alarm immunity. Flexible installations can be carried out quickly and error-free due to features like Auto Walktest and new End-of-Line concept (EoL).

- Unmatched detection performance – thanks to MAGIC mirror technology
- High immunity against false alarms
- 12 m volumetric optics with undercrawl protection – 30 m gapless curtain (option)
- Flexible, fast and error-free installation
- Modern and elegant design
- Low current consumption



Functions

■ Reliable detection

Thanks to the new and innovative MAGIC mirror (patented), intruders are detected effectively and reliably. The new double-mirror principle provides homogeneous coverage and sensitivity to all areas within the detection field. The proven and further enhanced Visatec algorithm supports the new optics.

Therefore, the MAGIC PIR detector PDM-I12/T is qualified for usage both in harsh environment and anywhere that the high false alarm immunity is a must.

■ High security level

The integrated anti-mask function reliably detects any potential covering of the detector. In addition to this, the sophisticated mirror design ensures full under-crawl protection.

Therefore, MAGIC PIR detector PDM-I12T complies with the highest security standards, such as VdS Klasse C, EN 50131-2-4 Grade 3 and many more.

■ High hurdles for intruders

A detector cannot be identified by its housing. Potential intruders – when confronted with MAGIC motion detectors – must assume the highest security level (e.g. EN 50131-2-4 Grade 3) irrespective of the actual detector type.

■ Fast and error-free installation


Thanks to pre-fitted End-of-Line (EoL) resistors, which are optimised for Siemens intrusion panels (SPC, Sintony), the time-consuming and error-prone resistor configuration can be omitted.

But PDM-I12/T can also be easily adapted to other intrusion panels: by simply replacing the pre-fitted resistors with standard resistors which are simply plugged-in or by usage of optional EoL boards. The connection to the intrusion panel can be done faster, easier and more reliably than with conventional wiring methods.

Additionally, the new Auto Walktest feature accelerates the installation of the detector. Verifying the installation and operation of the detector by means of a walktest no longer requires repeated openings of the detector nor adapting DIP switch settings.

■ Low current consumption

State of the art energy concepts and electronic components provide low current consumption of the detectors. Not only energy costs are decreased across the years of utilisation but also more cost efficient uninterrupted power supply units (like batteries) can be used in the intrusion panels.

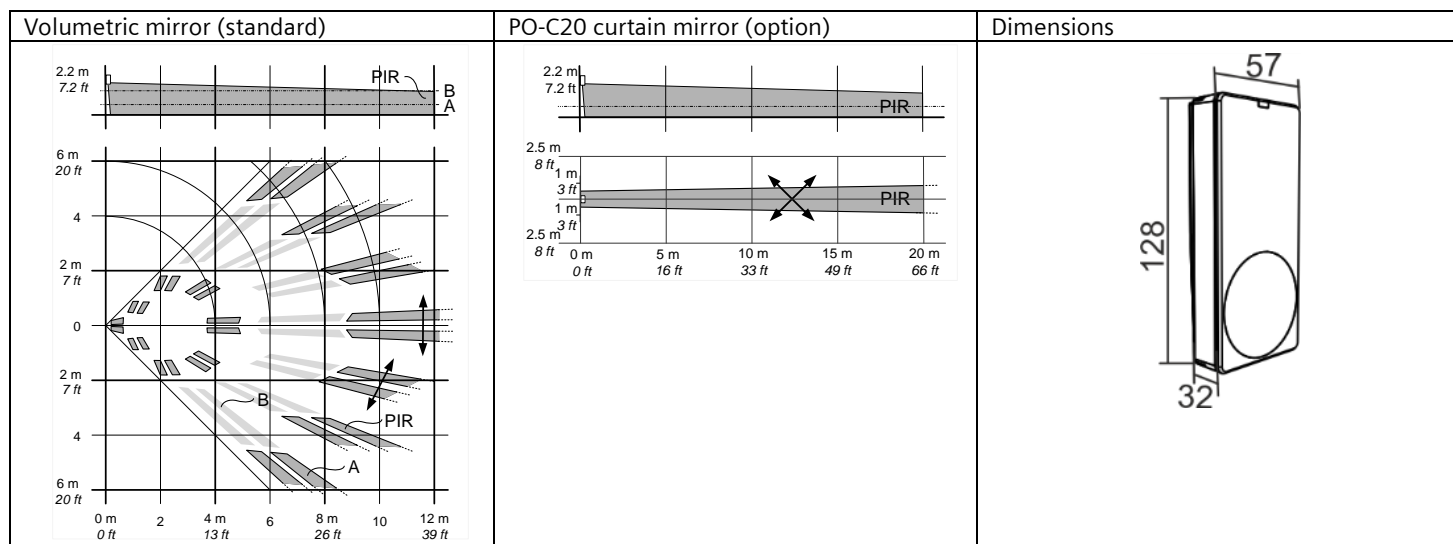

Technical data

| | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Power supply – Max. ripple (0 ... 100 Hz) – Voltage control | 9 ... 16 VDC (12 V nom.) 1,0 VSS Alarm at 8,0 ± 0,5 VDC |
| Current consumption (at 8 ... 16 VDC) – PDM-112 Idle state LED ON – PDM-112T Idle state LED ON | 2.5 mA (rms), 2.8 mA (max peak) 4.4 mA (rms), 4.7 mA (max peak) 3.9 mA (rms), 4.6 mA (max peak) 5.9 mA (rms), 6.6 mA (max peak) |
| Control inputs | LOW ≤ 1,5 V / HIGH ≥ 3,5 V R _{Pull-up} (internal) = 470 kΩ |
| Walking speeds – PDM-112 Volume mirror / curtain mirror PO-C20 – PDM-112T Volume mirror / curtain mirror PO-C20 | 0,2 ... 3,0 m/s / 0,2 ... 3,0 m/s 0,1 ... 4,0 m/s / 0,1 ... 4,0 m/s |
| Algorithm | VISATEC |
| EoL resistors (pre-fitted) RI RF REoL | 4.7 kΩ ±5%, 250 mW 2.2 kΩ ±5%, 250 mW 4.7 kΩ ±5%, 250 mW |
| Environmental conditions – Operating temperature – Storage temperature – Air humidity (EN 60721) – EMC-resistance up to 2,7 GHz – Housing protection category (EN 60529, EN 50102) | - 10° ... + 55°C - 20° ... + 60°C < 95% RH, non-condensing 10 V/m IP41 / IK02 |

■ Ordering Informations

| Type | Order No. | Description | Weight* |
|----------|------------------|--------------------------------------------------|---------|
| PDM-I12 | S54530-F114-A100 | PIR Detector | 0.1 kg |
| PDM-I12T | S54530-F105-A100 | PIR Detector with Anti-mask | 0.1 kg |
| PO-C20 | S54539-F122-A100 | Curtain Mirror Set (4 pcs) for PDM-I12 | 0.1 kg |
| PZ-MBG2 | S54539-F124-A100 | Mounting Bracket G2 for PDM | 0.1 kg |
| PZ-CA | S54539-F125-A100 | 1/4" Adapter for Camera Bracket, Set (4 pcs) | 0.08 kg |
| PO-CL | S54539-F126-A100 | Pet Clip for PDM-I12 | 0.05 kg |
| PO-PA01 | S54539-F127-A100 | EOL PCB RF=4k7 RI=4k7 REoL=4k7 (Set of 100 pcs.) | 0.15 kg |
| PO-PA02 | S54539-F127-A200 | EOL PCB RF=2k2 RI=4k7 REoL=2k2 (Set of 100 pcs.) | 0.15 kg |
| PO-PA03 | S54539-F127-A300 | EOL PCB RF=12k RI=1k REoL=1k (Set of 100 pcs.) | 0.15 kg |
| PO-PA04 | S54539-F127-A400 | EOL PCB RF=12k RI=6k8 REoL=4k7 (Set of 100 pcs.) | 0.15 kg |
| PO-PA05 | S54539-F127-A500 | EOL PCB RF=1k RI=3k3 REoL=3k3 (Set of 100 pcs.) | 0.15 kg |

* units incl. packing material, accessories which is part of scope of supply and technical documentation

For additional products and accessories, please go to www.siemens.com/intrusion > Catalogue Downloads.

Die Informationen in diesem Dokument enthalten allgemeine Beschreibungen der technischen Möglichkeiten, welche im Einzelfall nicht immer vorliegen müssen. Die gewünschten Leistungsmerkmale sind daher im Einzelfall bei Vertragsabschluss festzulegen.

© Siemens Building Technologies • Dokument Nr. A6V10402981 • Ausgabe: 07.05.2013 • Dokumentversion: 1.0