


### **Product Data Sheet**

# WC104W

Shielded Composite 2 + 2 Cable - 100 meters

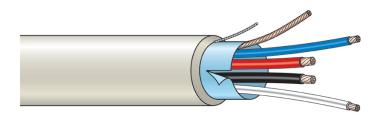

#### **Standard Features**

- For internal or external wiring of warning network systems
- Manufactured in accordance with BS4737 section 3.30
- Suitable for gluing to surfaces
- High quality PVC

# **WC104W**

### Shielded Composite 2 + 2 Cable - 100 meters

### Specifications

| Core                         |                                    |
|------------------------------|------------------------------------|
| Material                     | Plain copper                       |
| Thickness                    | 0.22 mm² (data) - 0.75 mm² (power) |
| Colour                       | Red, black (power)                 |
|                              | Blue, white (data)                 |
| Jacket                       |                                    |
| Thickness                    | Min. 0.45 mm2 - max 0.7 mm2        |
| Colour                       | White                              |
| Electrical characteristics   |                                    |
| Max. conductor DC resistance | 92.4 ohm/km at +20°C               |
| Current rating               | 1 A                                |
| Mutual capacitance           | 90 pF/m                            |

### **Ordering Information**

| Part No. | Description                                 |
|----------|---|
| WC104W   | Shielded Composite 2 + 2 Cable - 100 meters |

