


SWITCH, 8 (PoE) + 2 GIGABIT PORTS ART. IPSWP10N01A



Please read this manual thoroughly before use and keep it for future reference

www.comelitgroup.com

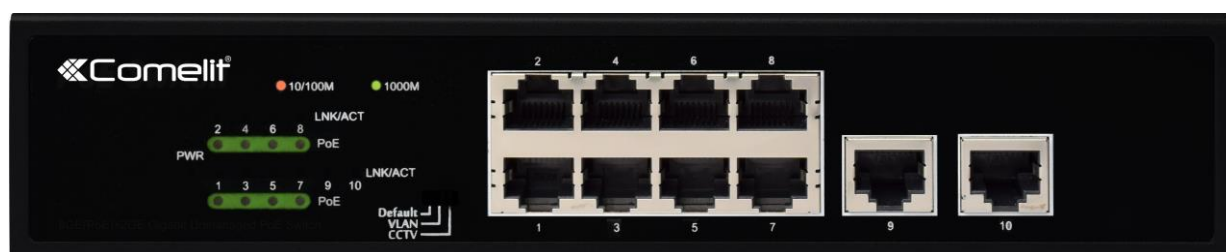

Via Don Arrigoni, 5 - 24020 Rovetta (BG) - Italy

Package contents

Check the contents of your package:

- PoE switch x 1
- User manual x1
- Power cord x 1
- Accessories

If any part is lost and damaged, please contact your dealer.

Introduction


The device have 8 (PoE) +2 Fast uplink 10/100/1000Mbit/s RJ45 ports that increase the speed of your network server and backbone connections, made Gigabit connection to a server or uplink a network.

The PoE ports automatically detect and power the IEEE 802.3af/at compliant Powered Devices (PD). The power is transmitted with the data in one single cable.

Hardware description

Front panel

The front panel consists of Ethernet RJ45 ports and the related leds.

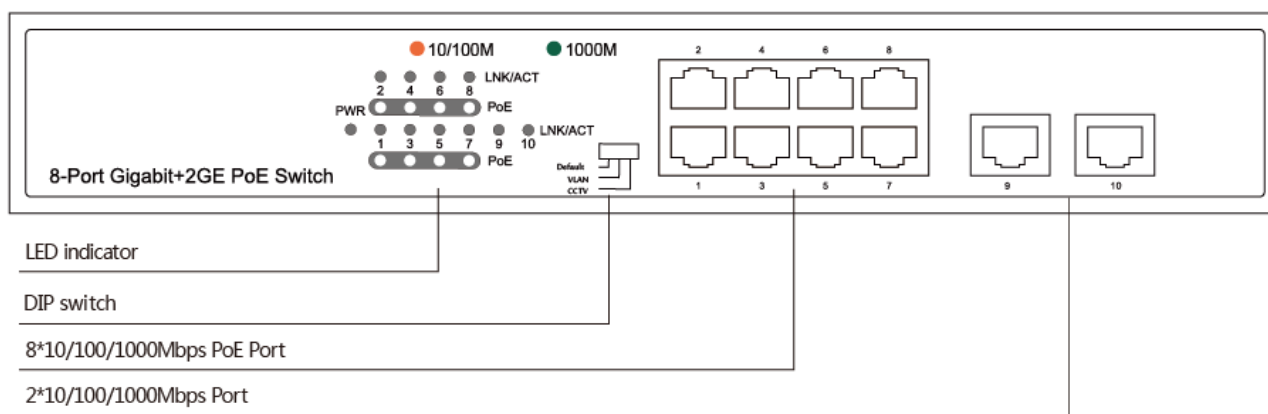

DIP switch

Default: normal communication between the ports 1~10.

VLAN: 1-8 ports are divided into a single VLAN but can communicate with the ports 9-10.

CCTV: extend the PoE distance up to 250m to expand your network.

Note: after changing the mode, You need to restart the device.


LED indications

LED	Color	Function
PWR	Green	OFF: no power supply. ON: power supply connected.
LNK/ACT	Orange	OFF: no device connected to the corresponding port. ON: the link through the port is successfully established at 10/100Mbit/s. Blink: the switch is sending or receiving data.

	Green	OFF: no device connected to the corresponding port. ON: the link through the port is successfully established at 1000Mbit/s. Blink: the switch is sending or receiving data.
PoE	Orange	OFF: no PoE (PD) connected. ON: PD successfully connected to the port. Blink: abnormal PoE supply.

Rear panel

In the rear panel there is an AC inlet power socket, which accepts input from 100 to 240VAC, 50/60HZ.

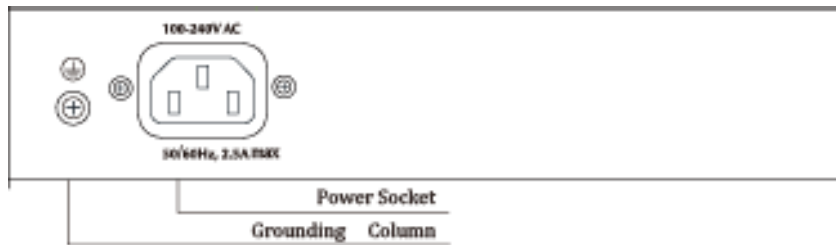

Power socket

Connect the female connector of the power cord here and the male connector to the AC power outlet. Please make sure that the voltage meets the requirement of the switch input voltage.



: connect to the ground to prevent lightning strike.


Installation

This part describes how to install the switch and make the connections. Please follow the instructions to avoid damages and security problems.

- Before cleaning the switch, unplug the power supply. Do not clean the switch with wet cloth or liquid
- Do not place the switch near water or any damp area. Prevent water or moisture from entering into the chassis
- Do not place the switch on an unstable place or desk. The switch might be damaged severely in case of fall
- Ensure proper ventilation of the equipment and keep the ventilation vents free of obstructions
- Make sure that the operating voltage is correct
- Do not open the chassis while the switch is powered to avoid electrical shocks.


Desktop Installation

Attach the rubber feet provided on the bottom at each corner. Allow adequate space for ventilation between the device and the objects around it.

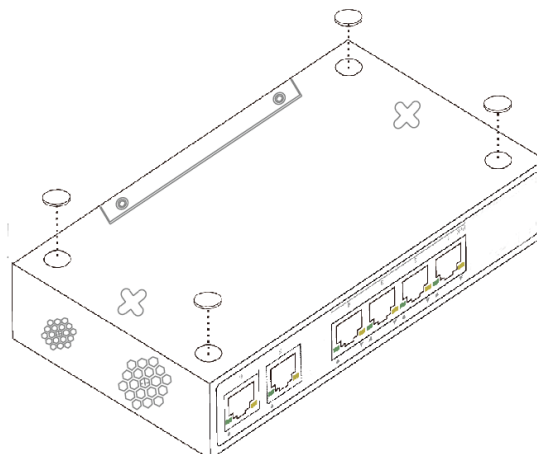

Wall-mounted installation

Fix the switch on the wall with 2 screws

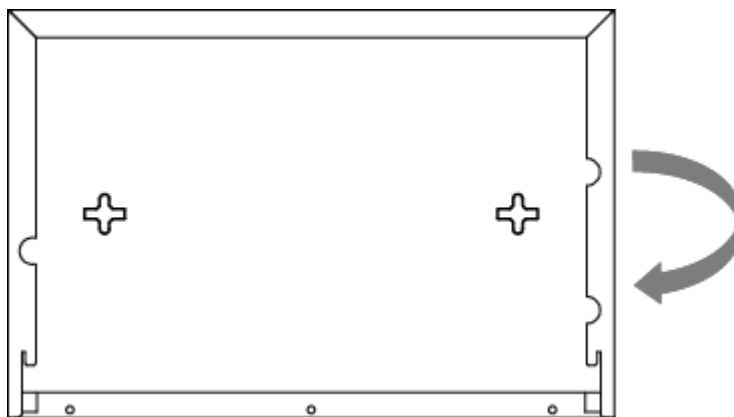

Turn ON the switch

When powered, the switch start automatically, the led lights up as follows:

- the Power led lights up
- the data led blink for one second (represents the system reset)

Note: make sure that the voltage is correct before power ON, otherwise the switch will be damaged.

Specifications

Supported standards	IEEE802.3, IEEE802.3u, IEEE802.3ab ,IEEE802.3az, IEEE802.3x,IEEE802.3af, IEEE802.3at
Network cables	1000BASE-T: UTP category 5e cable (≤100m) 10BASE-T: UTP category 3,4,5 cable (≤100m) 100BASE-TX: UTP category 5 cable (≤100m)
MAC address table	4K, auto-learning, auto-aging
Transfer mode	Store-and-Forward
Frame forward rate	10Base-T: 14881pps/port 100Base-TX: 148810pps/port 1000Base-TX: 1488095pps/port
Switching capacity	20Gbit/s
Dimensions (L x H x D)	220 x 44 x 150mm
Fan	1
Power supply	100~240VAC, 50/60Hz
PoE ports	1~8
PoE power on RJ45	Mode A: pin 1/2 (+), pin 3/6 (-)
PoE power output	55VDC/32W (max)/port
PoE power budget	120W
Temperature	Operating: 0°C ~ 40 °C (32 °F ~104°F) Storage: -40 °C ~ 70 °C (-40 °F ~158°F)
Humidity	Operating: 10% ~ 90% non-condensing Storage: 5% ~ 90% non-condensing