



TVB-1105

3.0 MPX HD Outdoor IR Bullet Camera, 2.8 to 12 mm, PAL

Overview

The TVB-1105 is an Full HD IP Outdoor IR Bullet camera, designed to perform in a wide range of lighting conditions. Its built in IR LEDs provide illumination up to 30 meters to ensure images – even in low light environments. The camera's Digital Wide Dynamic Range feature ensures that images are obtained, even in backlight scenes.


The camera is compliant with the ONVIF and PSIA open standards.

Form Factor

The size of this mini bullet camera makes it easy to install, for example, at entry or exit doors. The IP66 rated housing provides a weatherproof solution.

IP technology

TruVision cameras utilize H.264 compression with dual-streaming capability, making it easy to manage the camera's bandwidth usage. These cameras have been designed to adhere to PSIA and ONVIF open communication standards, and also support a CGI command set for simple integration into any IP system. Video streams can be set up for high and low bandwidth and images can be streamed for live viewing or sent to a designated recording location.

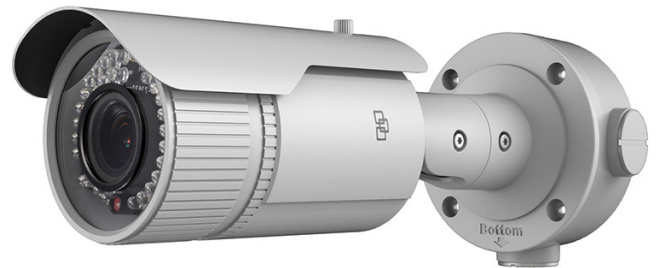

Standard Features

- IR bullet camera
- Real time Full HD 1080p resolution
- Maximum resolution QXGA (2048 x 1536)
- H.264 with dual streaming functionality
- 1/3" CMOS Progressive Scan
- Motorized IR cut filter
- Digital Wide Dynamic Range
- 0 Lux (IR on)
- Up to 30 m IR illumination
- 2.8 to 12mm lens
- Audio In / Out
- Alarm In / Out
- Designed to ONVIF and PSIA open standards

TVB-1105

3.0 MPX HD Outdoor IR Bullet Camera, 2.8 to 12 mm, PAL

Specifications

Camera	
Sensor Size:	1/3"
SD / MPX:	3.0 MPX
Sensor scan:	Progressive Scan
Sensor type:	CMOS
IP Compression / Standard:	Main stream: H.264 Sub stream: H.264/MJPEG
Available Resolutions:	Main stream: 2048x1536,1920x1080,1280x720 Sub stream: 704x576,352x288,320x240
Maximum Resolution (@ FPS):	2048 x 1536 @12.5 fps
Maximum Real Time Resolution:	1920 x 1080
HD 720p:	Yes
Full HD 1080p:	Yes
Digital S/N ratio:	50dB
Electronic shutter:	1/25s to 1/100.000s
Certification:	UL, CE, FCC, C-tick, REACH, RoHS, HALT, WEEE
Lighting performance	
Wide Dynamic Range:	DWDR
WDR in dB:	72dB
Digital noise reduction:	3D DNR
Day/Night:	True Day/Night
Motorized IR Cut Filter:	Yes
Color sensitivity:	0.07 Lux @(F1.2,AGC ON)
B/W sensitivity:	0 Lux with IR
IR sensitivity:	0 Lux with IR
IR Range:	Up to 30 m
IR Wavelength:	850 nm
B/W trigger:	3.0 lux
IR trigger:	3.0 lux
Housing	
Camera type:	Bullet
IP rating:	IP 66
Outdoor:	Yes
Rugged:	No
Lens	
Control type:	DC
Optical zoom:	No
Focal length:	2.8 to 12 mm
F-stop:	1.4
Autoiris:	Yes
Varifocal:	Yes
Zoom lens:	Yes
Autofocus:	No
Power consumption	
Voltage Input:	12VDC \pm 10%
Current:	Max. 0.625 A
Power Consumption:	Max. 7.5 W
PoE:	PoE(802.3af)
Network	
ONVIF:	2.2
PSIA:	1.1
CGI:	Yes
Network Protocols:	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, UPnP, SNMP, HTTPS, FTP, 802.1x, Qos, IPv4/IPv6
Local Storage	
Media:	Micro SD/SDXC
Capacity:	Up to 64 GB
Camera Analytics	
Motion Detection:	Yes
Privacy Masking:	Yes
Alarm In / Out	1 / 1

Audio	
Input	Wire for 1ch. audio interface (2.0 - 2.4 Vp-p, 1 kOhm)
Output	Wire for 1ch. audio interface (2.0 - 2.4 Vp-p, 1 kOhm)
Mechanical / Environmental	
Dimensions:	\varnothing 104.8 \times 255.6 mm (4.13 x 10.02 in)
Weight:	800g (1.76 lb)
Cold start Temperature	-30°C (-22°F)
Operating Temperature:	-30°C to 60°C (-22°F to 140°F)

Ordering Information

Part No.	Description
TVB-1105	3.0 MPX HD Outdoor IR Bullet Camera, 2.8 to 12 mm, PAL

