

TVW-5305

TruVision IP Wedge Camera, 4 MPX, 2.8mm Lens, WDR, 10m IR, Grey

TruVision® IP Megapixel Wedge IR Cameras by Interlogix bring high-definition images to the mass video surveillance segment. With 2MPx or 4MPx resolution options, these cameras provide flexibility for a wide variety of applications.

The IP Megapixel Wedge IR Cameras also adhere to ONVIF® Profile G and S open communications standards as well as support CGI command set for simple integration into standard IP systems. By utilizing an integrated browser and micro SD memory card storage capability, these cameras simplify remote, live monitoring/playback of edge-recorded audio and video. Memory card recording also helps protect data in the event of network disruptions.



Standard Features



- IR Wedge camera
- Real time Full HD 1080p resolution
- Maximum resolution 2688 x 1520
- H.264 with dual streaming functionality
- 1/3" CMOS Progressive Scan
- Motorized IR cut filter
- Wide Dynamic Range (120dB)
- Up to 10m IR illumination
- Fixed 2.8 mm Lens
- Grey housings
- Designed to PSIA and ONVIF Profile G and S open standards

TVW-5305

TruVision IP Wedge Camera, 4 MPX, 2.8mm Lens, WDR, 10m IR, Grey

Specifications

Camera	
Sensor Size	1/3"
Sensor Scan	Progressive
Sensor Type	CMOS
Max. Resolution	4 MPX
Total Pixels (H x V)	2688 x 1520
Effective Pixels (H x V)	2688 x 1520
Sensor Size:	1/3"
SD / MPX:	4MPX
Sensor scan:	Progressive Scan
Sensor type:	CMOS
IP Compression / Standard:	H.264 / MJPEG
Maximum Resolution:	2688 x 1520
Maximum Real-Time Resolution (@fps):	1920 x 1080 @ 25/30 fps
Digital S/N ratio:	50dB (AGC OFF)
Electronic shutter:	1/3s to 1/10.000s
Certification:	FCC, CE, UL, WEEE, RoHS, REACH
Lighting performance	
Wide dynamic range (WDR)	True WDR
WDR	120 dB
Digital Noise Reduction	3D DNR
Day/Night	True Day/Night
Motorized IR Cut Filter	Yes
Color Sensitivity	0.01 lux @ (F1.2, AGC ON)
B/W Sensitivity	0 lux with IR on
InfraRed (IR)	Yes
IR Sensitivity	0 lux with IR
IR Range	Up to 10 m
IR Wavelength (nm)	850 nm
Wide Dynamic Range:	WDR
WDR in dB:	120dB
Digital noise reduction:	3D DNR
Day/Night:	True Day/Night
Motorized IR Cut Filter:	Yes
Minimum Illumination:	0.01 lux @ f1.2, AGC On; 0 lux with IR
IR Range:	Up to 10m
IR Wavelength:	850nm
Encoding	
Video Compression Main Stream	H.264
Video Compression Sub Stream	H.264, M-JPEG
Main Stream Supported Resolutions	2688 x 1520
Max. Resolution @ fps	1920 x 1080 @ 25 fps
Video Bit Rate	128kbps to 16Mbps
Lens	
Focal length	2.8 mm
Auto-iris	No
Auto-focus	No
Motorized Zoom	No
Lens Type	Fixed
Network	
Supported Network Protocols	802.1x, DDNS, DHCP, DNS, FTP, HTTP, HTTPS, IPv4, IPv6, NTP, PPPoE, Qos, RTP, RTSP, SMTP, SNMP, TCP/IP, UPnP
Supported Video Standards	CGI, ONVIF, PSIA
ONVIF:	Interoperability ONVIF (Profile G/S)
PSIA:	Yes
CGI:	Yes
Network Protocols:	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos, IPv6
Audio	
Audio In	1
Audio Out	1
Audio Compression	G.711, G.722.1, G.726, MP2L2
Input:	1 Mic-in, Built-in Mic
Output:	1
Audio bit rate (protocol)	G.722.1, G.711ulaw, G.711alaw, MP2L2 and G.726
Alarm I/O	
Alarm Outputs	1
Alarm I/O Connection	Terminal Type
Alarm Inputs	1
Storage	
Max Storage Capacity	128GB
Local Storage Support	Yes
Local Storage Type	Built-in Micro SD/SDHC/SDXC card slot
Video intelligence	
Basic Alarm Detection	Motion, Privacy Masking, Tamper
Intelligent Tracking	No
Video Analytics	Cross line, Intrusion detection
General	
Technology	IP
Display Modes	Hallway View, Mirror, ROI (Region Of Interest)
Video Standard	NTSC, PAL
Software Compatibility	OnGuard, Prism, TruVision Navigator, TVRmobile, Web Browser
Electrical	
Power supply type	PoE in, VDC
Power supply value	12 VDC
Power consumption	5 W
Current consumption	0.42 A
Physical	
Form Factor	Wedge
rugged	IK8
Part No.	Description
TVW-5305	TruVision IR Wedge, 4 MPX, True D/N, WDR, 10m IR, 2.8mm @ F2.0, Built-in Mic, Audio Alarm, MICRO SD/SDHC/SDXC slot, PoE

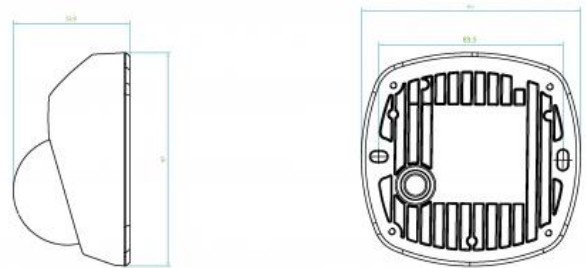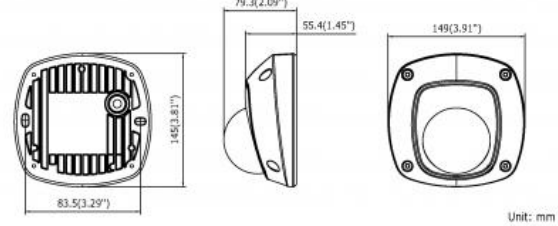

Unit: mm

Ordering Information